

Apollo Series 1100

STANDARD OPERATING VOLTAGE:

3V DC

OPERATING CURRENT (MAX)

9mA

STANDBY CURRENT

200µA

STANDBY MODE ACTIVATION

2-3 min. without signal

AMPLIFIER GAIN - SPEAKER

13dB (Max)

MICROPHONE


30dB (Max)

BATTERY

2 x "AA"

ADAPTER DC INPUT

6V-9V DC

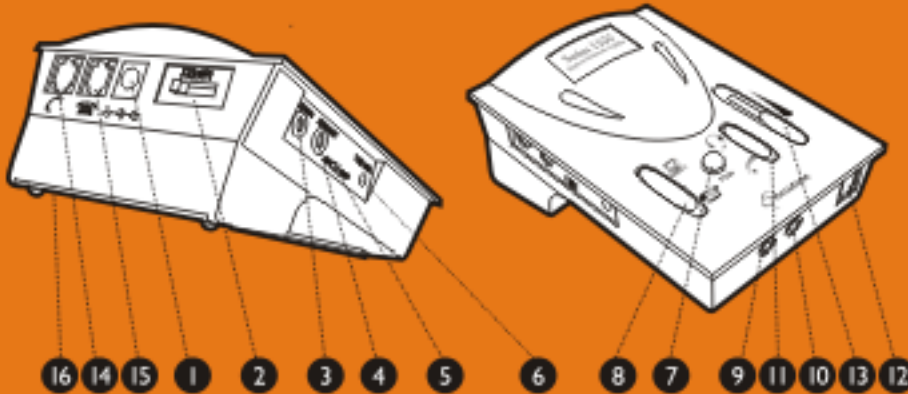

MAIN SWITCHES AND INTERFACE

1. External DC Supply Jack (6V DC to 9V DC)
2. Telephone Configuration Switch
3. <Line In> Jack (3.5mm diameter stereo) from Computer Line Out
4. <Line Out> Jack (3.5mm diameter stereo) from Computer Line In
5. Power <On/Off> Switch
6. Rotary Transmission <Mic Volume> Control
7. <Mute> Switch
8. <Telephone/Computer> Application Switch
9. Computer Headset Jack (3.5mm diameter stereo) from Speaker Plug
10. Computer Headset Jack (3.5mm diameter stereo) from Microphone Plug
11. <Headset/Handset> Application Switch
12. Modular Jack for <Telephone> Headset
13. Slide Reception Volume Control
14. Modular Jack for <Telephone> Handset
15. Modular Jack for Input from Telephone Unit
16. Battery Compartment Door

Specification Sheet